

Sentinel DTS

Distributed Temperature Sensing System

The TAQA Sentinel DTS unit is the most technologically advanced distributed temperature sensing system today

DTS gives you the tool to continuously obtain measurements in real time along the entire length of your wellbore. The Sentinel range of DTS units lead the way in terms of performance in DTS technology, with temperature resolutions better than 0.01°C achieved in the field, the fastest measurement speeds available and the greatest coverage of up to 45km from a single channel. Based on analysis of Raman back-scatter signals in an optical fiber, DTS systems use a combination of variations in backscattered light intensity and time domain reflectometry to create temperature against distance profiles. The fiber acts as both sensing element and transmission medium. Many thousands of discrete measurement points can be achieved over distances up to 30km using a single fiber.

Surface Acquisition Unit

The self-contained Sentinel DTS surface system operates with an intuitive user interface allowing fast and simple calibration and configuration. The system has been designed with safety in mind and has been tested to the industry's most rigorous standards.

Features

- High performance - industry leading temperature resolution better than 0.01°C enables interpretation in the most difficult applications
- Fine spatial resolution - 1m spatial resolution allows accurate location of changing temperature events
- Fast measurement speed - Measurements as short as 10 seconds to enable real-time monitoring of transient events, particularly in safety critical applications

Benefits

- Intuitive configuration - intuitive user interface allowing fast and simple calibration and configuration. Double-ended calibration through use of a multiplexer
- Multiple channels - 4, 8 and 16 channel multiplexer modules available to increase system flexibility
- Remote operation - system can be configured and operated remotely through its Ethernet interface




TAQA offers the widest range of DTS to meet your every monitoring requirement, specific to any need, environment and challenge. You can rely on us to provide the full solution - from system engineering and design, to installation, data interpretation services and global support services. We will take the time to fully understand your business goals and the unique context and physical circumstances of your asset to provide the best solution to you.

Coupled with the SureSight permanent cable range, the Sentinel DTS gives you the tool to continuously


obtain measurements in real time along the entire length of your wellbore. Laser light pulses generated within the Sentinel DTS control unit are launched into the optical fiber. As the light pulse encounters temperature features along the fiber, the pattern of back-scattered light is analysed to provide a real time temperature footprint.



Sentinel DTS-LR performance

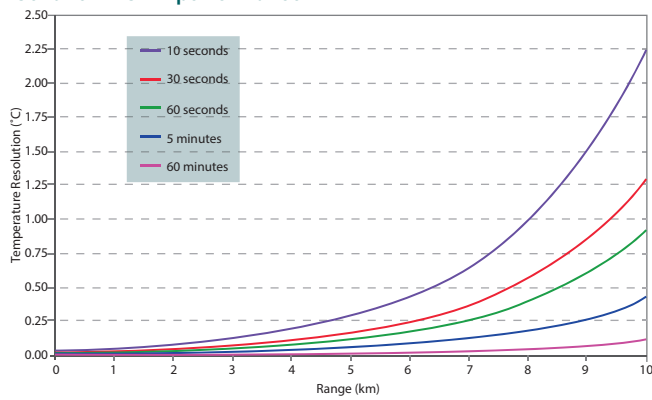

Sentinel DTS-XR performance

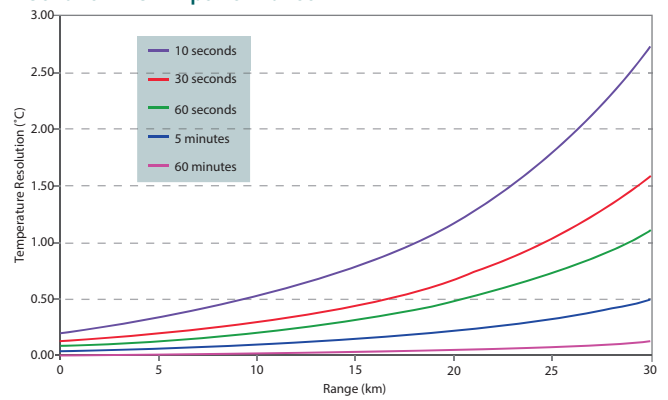

Technical Specifications	Sentinel DTS - XR 15km (MM)	Sentinel DTS - XR 30km (MM)	Sentinel DTS - XR 45km (MM)
Unit Description	Medium Range	Long Range	Extreme Long Range
Range	0 - 15km	0 - 30km	0 - 45km
No. of channels	4, 8 and 16 channel multiplexer	4, 8 and 16 channel multiplexer	4, 8 and 16 channel multiplexer
Spatial Resolution	1 - 2m	1 - 2m	5m
Sampling Resolution	0.5 - 1m	0.5 - 1m	2m
Operating Temperature	+5°C to +40°C		
Power Requirements	100 - 240 VAC		
Power Consumption	200W Maximum		
Dimensions	180 x 435 x 480mm / 7.1 x 17.1 x 18.9"		
Weight	21kg / 46lb		
Communication Options	<p>The Sentinel DTS is compatible with a wide range of communications options:</p> <ul style="list-style-type: none"> • Direct link to PCs / Laptops • Serial RS-232 / 485 • Wired Ethernet • USB - 4 X USB 3.0 • Modem 		
Certification and Compliance	<p>The Sentinel DTS has been independently classified to BS EN 60825-1:2014 as a Class 1M laser product.</p> <p>Atex Compliance: Sentinel AX is Certified Atex Cat. M1 (Mining). All the other Sentinel models are certified Cat.3 and are suitable for use in Potentially Explosive Atmospheres according to Directive 2014/34/EU Standards: EN 60079-0:2012, EN 60079-28:2015</p> <p>EMC Compliance: EN 61326-1:2013 Lab Equipment; EMC EN55022/CISPR22 Conducted Emissions: Class B; Radiated Emissions: Class A**; EN 61000-4-2:2008; EN 61000-4-3:2006; EN 61000-4-4:2012; EN 61000-4-5:2008; EN 61000-4-6:2013; EN 61000-4-11:2008;</p> <p>CE Compliance: Accordance with 89/336 EEC EMC Directive Accordance with LVD 72/23 EEC Directive: EN 41003; EN 50178; EN 60065; EN 60825-1; EN 60950; EN 61010-1</p>		

Note: Sentinel units are also available for use with Single Mode Fiber ranging of 15km, 30km and 45km.